

CA Compliant


BayBond™ Contact Adhesive
BayBond™ is a high solids, flammable solvent contact adhesive.

ADVANTAGES

- Aggressive – Adheres to nearly any surface
- Fast dry with excellent initial bond
- Good in both hot and cold conditions
- High-strength, long-term bond
- Can be applied by brush, trowel or roller. Brush is supplied with system.
- 80% of final strength achieved immediately
- Full strength achieved in 24 hours
- No urea formaldehyde added
- Qualifies for LEED 3.2, 4.1, 4.4
- Ozone Transport Commission (OTC) compliant
- Low VOC California compliant (SCAQMD Rule 1168 Compliant)

PRODUCT DESCRIPTION

BayBond™ is designed as a multi-purpose contact adhesive that effectively bonds while maintaining compliance with California VOC requirements.



DIRECTIONS FOR USE

Should be applied to both surfaces to be bonded, 80% to 100% coverage with supplied brush. Allow to dry to the touch. Parts should be mated under pressure. Bonds should be made as soon as practical. If adhesive is left to dry for over 2 hours, parts should be recoated.

Notice!!! Avoid direct flame or exposure to excessive heat. Do not store at temperatures over 120° F.

HANDLING & STORAGE

- Consult Safety Data Sheet prior to use.
- Do Not store at temperatures over 120°F or below 32°F.
- Avoid exposure to direct sunlight.
- Always test product to determine suitability for your particular application prior to use in production.


| CHEMICAL TECHNICAL DATA | |
|-------------------------|----------------------|
| TYPICAL PROPERTIES | |
| VOC Content | 79.2 grams per liter |
| Total Solids | 32%-38% |
| Color | Clear |
| Shelf Life | 15 Months |

PACKAGING

- One Gallon Pail



(Photo of Actual Fabric)

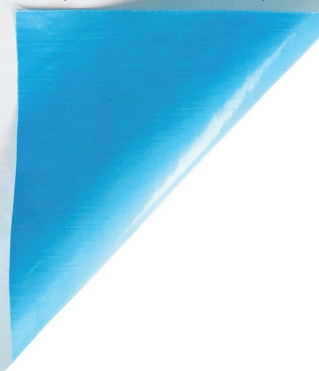

DISCLAIMER OF WARRANTY: Skyliner Fabrics Inc. makes neither warranty of merchantability or fitness for any use nor any other warranty, express or implied, in the sales of its products. Buyer assumes all risk and liability for the results obtained by the use of its products, whether used singly or in combination with other products.

For information on the Skyliner® Insulation System, contact your Bay District Manager, call **844.999.7153** or visit **www.SkylinerSystems.com**